

MODEL: 50031CON
ASSEMBLY INSTRUCTIONS
READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS FOUNTAIN SHOULD TAKE APPROXIMATELY 5 MINUTES TO ASSEMBLE.


MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE FOUNTAIN


YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: LID, FOUNTAIN BODY, PUMP, SOLAR PANEL, BRACKET, TUBE, STAKE AND STOPPLE. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

FOUNTAIN ASSEMBLY


1. ATTACH THE PUMP TO RUBBER HOSE, FEED THE PUMP POWER CORD THROUGH THE PLASTIC TUBE TOWARD BOTTOM OF BASE, CORD EXIT OUT FROM CHANNEL ON THE BOTTOM OF THE FOUNTAIN BODY.

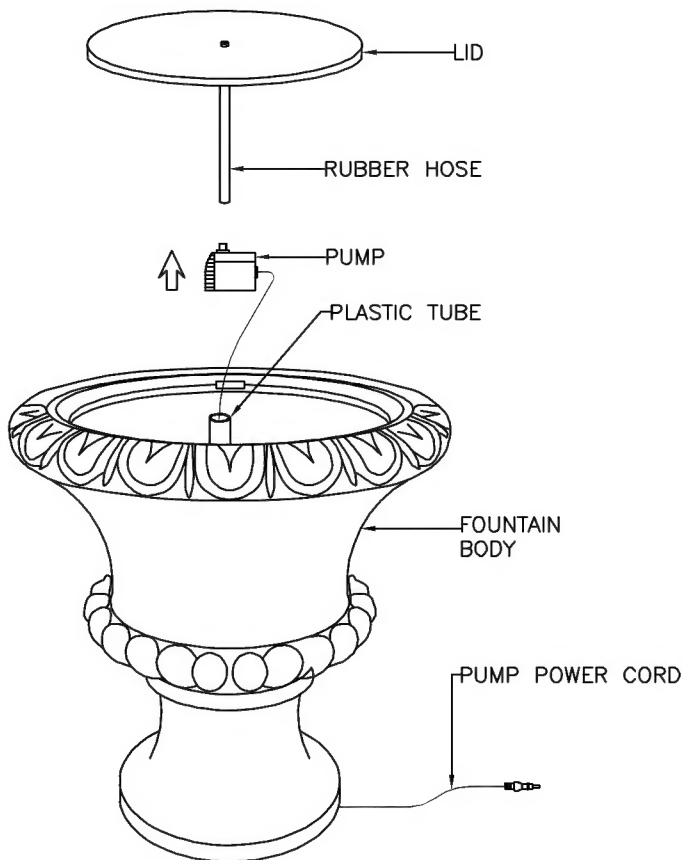

2. PULL THE EXCESS POWER CORD THROUGH BOTTOM OF FOUNTAIN BODY, INSERT THE STOPPLE INTO PLASTIC TUBE TO COVER THE HOLE, THEN PLACE THE LID INTO THE RESERVOIR.

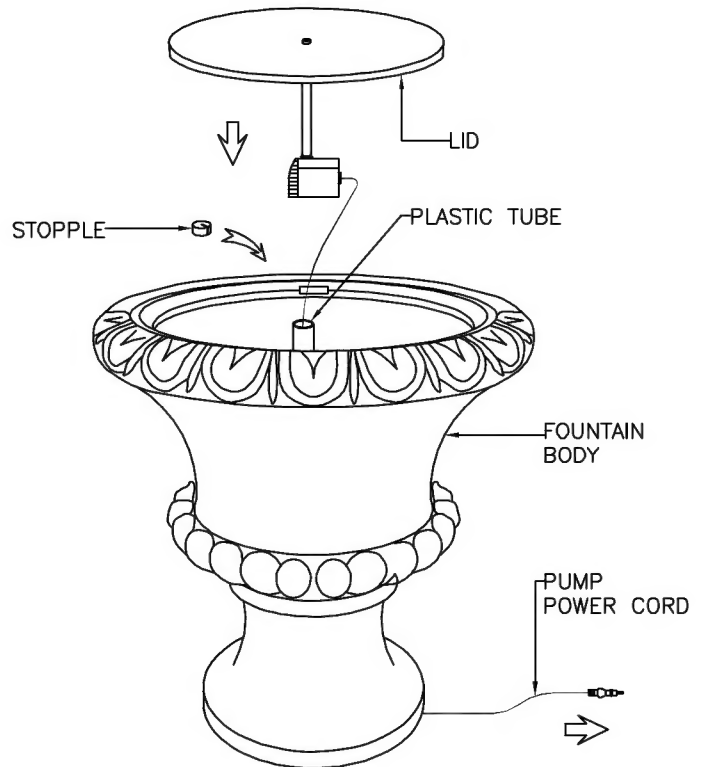


3. JOIN BRACKET, TUBE AND STAKE TOGETHER, THEN ATTACH BRACKET TO BACK OF THE SOLAR PANEL AS SHOWN.

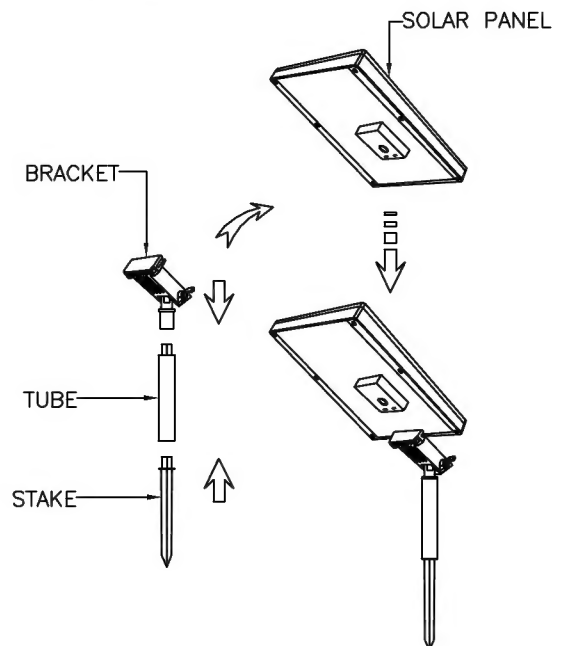

MODEL: 50031CON
ASSEMBLY INSTRUCTIONS
READ AND SAVE THESE INSTRUCTIONS


FOUNTAIN ASSEMBLY

4. TWIST PUMP PLUG SLIGHTLY AND PUSHING IT INTO THE HOLE FOR PUMP PLUG, MAKE SURE THE SEALING RING IS FULLY IN GROOVE.

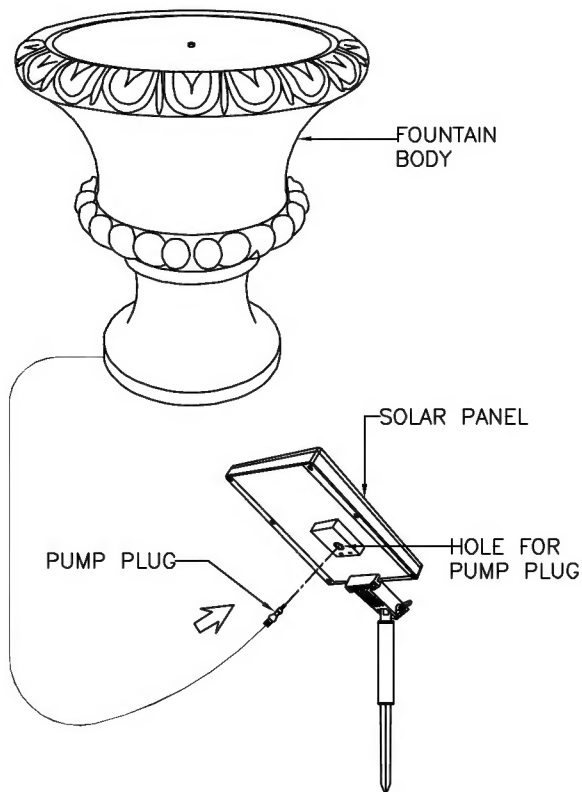


5. INSERT STAKE INTO GROUND.

NOTE: YOU CAN ADJUST THE DIRECTION OF SOLAR PANEL BY LOOSING THE WING NUT.

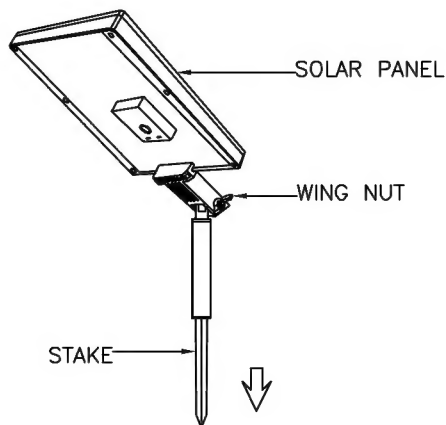


6. FILL RESERVOIR WITH 0.5 GALLONS OF WATER TO COMPLETELY SUBMERSE THE PUMP.

NOTE: DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD-UP.

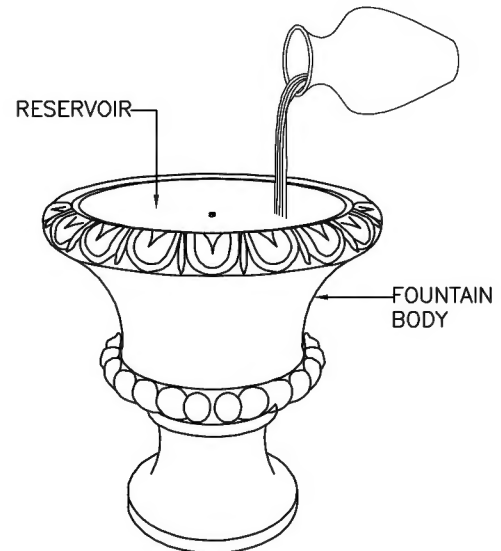

7. THE PUMP WILL TURN ON AUTOMATICALLY WHEN THE SOLAR PANEL GET DIRECT/ENOUGH SUNLIGHT.

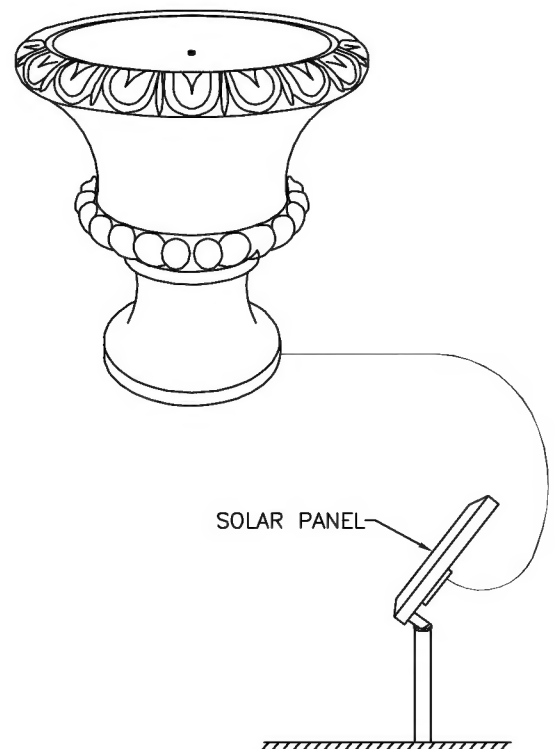

MODEL: **50031CON**
ASSEMBLY INSTRUCTIONS
READ AND SAVE THESE INSTRUCTIONS

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK SOLAR PANEL IS IN CORRECT POSITION, RECEIVING DIRECT SUNLIGHT AND NOT IN SHADOW.
2. CHECK CONNECTIONS BETWEEN THE PUMP AND THE SOLAR PANEL.
3. CHECK WATER LEVEL AND MAKE SURE THE PUMP IS SUBMERGED.
4. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

IMPORTANT PUMP INFORMATION:

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

IMPORTANT NOTES:

1. THE PUMP WILL TURN ON AUTOMATICALLY WHEN THE SOLAR PANEL GET DIRECT/ENOUGH SUNLIGHT.
2. TO GET BEST PERFORMANCE FROM THE SOLAR PANEL IN THE SUNSHINE, PLEASE MAKE SURE THAT YOU PERIODICALLY CLEAN THE TOP SURFACE OF THE SOLAR PANEL (DO NOT USE A CHEMICAL SOLVENT).

WARNING:

* ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

** THIS FOUNTAIN IS RATED FOR OUTDOOR USE.

*** MOVE YOUR FOUNTAIN INTO YOUR ROOM IN FREEZING DAYS TO PROTECT THE FOUNTAIN.

**** IF YOU DO NOT WANT TO USE THIS FOUNTAIN FOR LONG TIME, PLEASE UNPLUG THE PUMP PLUG FROM BOTTOM OF SOLAR PANEL.